


seepex.com
all things flow

Here is your conveying solution:
Product group T, range BTH/BTHE.



T – Open hopper pumps, range BTH/BTHE

seepex range BTH pumps are used in many industries to handle highly viscous products with minimal flowability. The modular design of the BTH pump allows flow rates up to 130 m³/h (220 gpm) at differential pressures of max. 36 bar (540 psi).

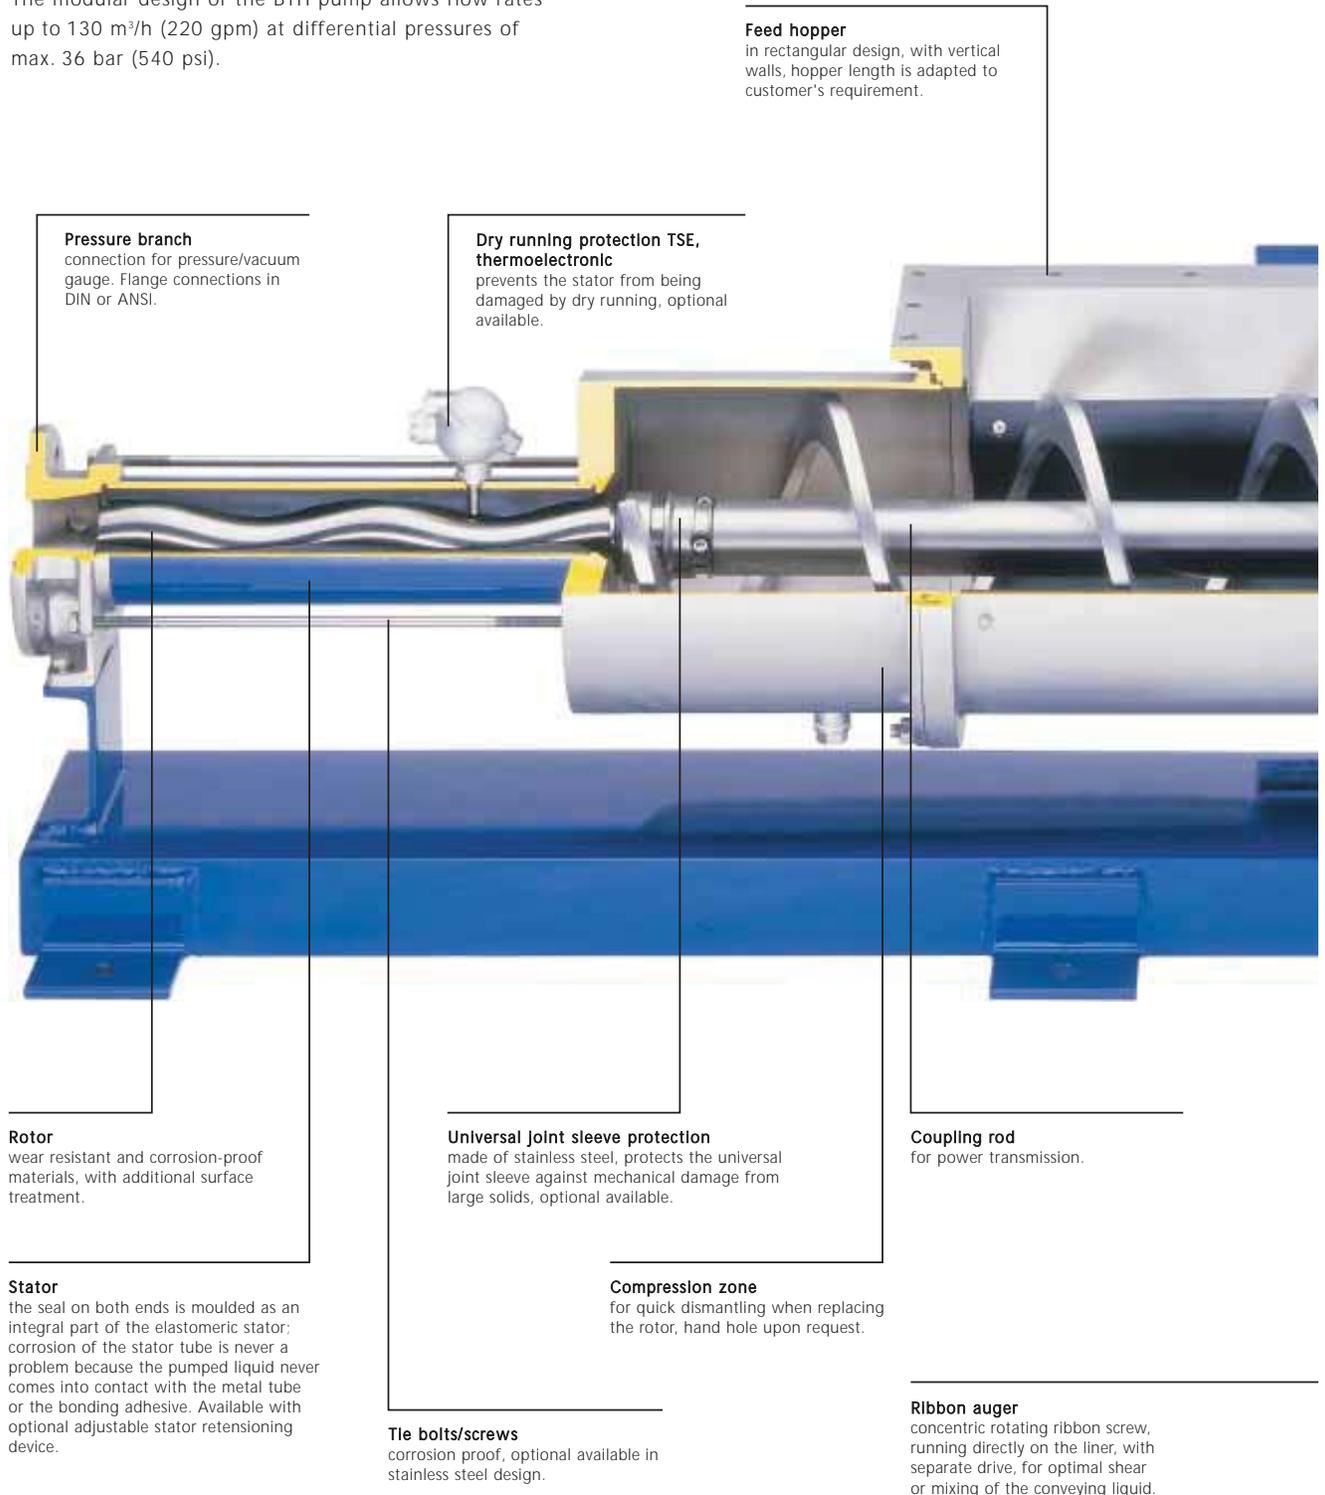

Hopper Insert
as bearing and protection from wear
for the ribbon auger.

Ribbon auger drive
geared motors, variable speed drives
or frequency controlled drives from
all major manufacturers.

(see detail)

Plug-In shaft connection
for quick disassembly or repair of pump and drive, for
quick replacement of the rotating parts and shaft seals;
with plug-in shaft pin and splash ring seal to secure the
plug-in shaft connection and additionally protect the
bearing from contamination/gland leakage.

Pump drive
geared motors, variable speed drives
or frequency controlled drives of all
major manufacturers, directly flanged
to the pump without additional coup-
plings or guards.

Lantern
for connection of pump and drive and
to secure the assembly to the base-
plate or directly to the foundation.

Shaft sealing
designed as cartridge unit with
quench.

Joint connection
consisting of just 5 components. Power transmission through
wear resistant, hardened and replaceable joint parts: easily
repaired.

Universal Joint sleeve with holding bands
protects the grease-filled joints from penetration of the liquid
pumped, even in case of maximum vacuum or pressure load-
ing: streamlined design to reduce turbulence and NPSHr.

Detail: Ribbon auger drive



Why range BTH/BTHE?

Because they are used in applications such as the brewing industry and distilleries, confectionery industry, construction, dewatered sludge treatment, dyeing and varnishing industry, oil, gas and petrochemical industry, poultry and meat processing, shipbuilding, sludge dewatering, stock preparation, textile industry, waste water and sludge treatment and wood processing.

Features

- These pumps incorporate an open hopper and auger feed screw which enables highly viscous products to be fed into the pumping elements
 - The pitch and diameter of the auger can be adjusted according to operating conditions for optimal product feed
 - Ribbon screw rotating concentrically and on the liner
 - Adaptation of the screw speed through a separate drive (range BTH)
 - Compression housing removable for service work
- > Conveying capacity: 0,5 m³/h–130 m³/h (2.2 GPM–572 GPM),
Pressure: up to 36 bar (540 psi)

Overview of ranges

The BTH range combines the various advantages of product group T. It is characterized by a separately driven, concentrically rotating ribbon screw with a maximized diameter and a long pitch. Through separate control of the conveying screw speed, the BTH pump can be used for almost any conveying media. The variable speed auger screw permits optimum filling of the conveying elements rotor and stator without causing excess capacity in the stuffing box. Even media that tend to form bridges can be handled with ease due to the large screw diameter of the BTH pump. The BTH range is the technical optimum solution for shear sensitive conveying media.

Range BTH



Pumps of the BTHE range feature a feed hopper with vertical hopper walls and a ribbon screw rotating centrally and on the edges. This guarantees optimum emptying of the feed hopper and optimised feed of the medium into the conveying elements of the pump. The length of the hopper opening is variable to suit the respective application conditions.

Range BTHE



seepex.com

all things flow

And what can we get flowing for you? Your nearest contact:

Or visit www.seepex.com

BTH/BTHE 8.07E