

# PARAGON<sup>®</sup> COOLING TOWERS

## Induced Draft, Counter Flow Design 55 - 250 Ton Single Modules

### NON-CORRODING SHELL


HDPE Plastic  
Construction can not corrode and is backed by 20 Year Warranty.

### LIGHTWEIGHT AND HEAVY DUTY

Plastic is lighter than conventional cooling towers and average wall thickness is 5-10 times sheet metal towers.

### LEAK-PROOF SUMP

Molded as Unitary (One-Piece) Structure that has no joints to leak or require re-caulking and sealing.

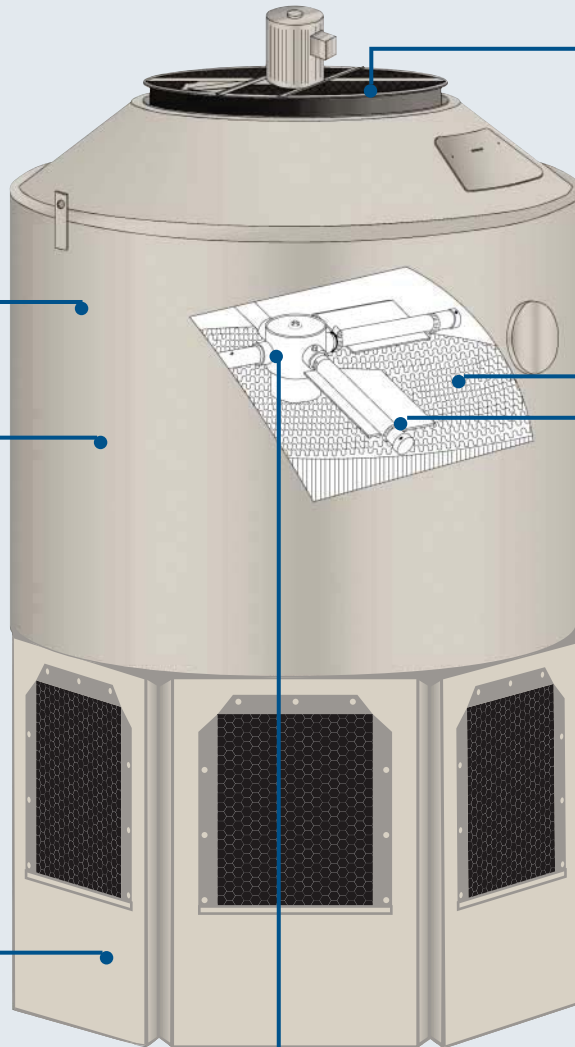

### DIRECT DRIVE AIR MOVING SYSTEM

Totally enclosed premium efficiency cooling tower motor powers fiber-reinforced polypropylene axial propeller fan.

### FILL MATERIAL

High efficiency spiral wound PVC cellular design for maximum cooling.

**ASHRAE 90.1**  
Meets New Energy Efficiency Standards  
All Models

### DRIFT ELIMINATOR

Polyethylene drift eliminators prevent water droplets from leaving the tower.

### WATER DISTRIBUTION SYSTEM

Self-propelled multiple PVC rotating arm system evenly distributes the water. Fixed nozzle system also available.

Model Number	Approximate Shipping	Weight Operating	Dimensions Dia. x Ht.	Capacity Tons	Fan Motor HP	Sump Capacity Gallons
ΔT-55I	1640	3980	84" x 146"	55	2	330
ΔT-70I	1640	4050	84" x 146"	70	3	330
ΔT-85I	1640	4070	84" x 146"	85	5	330
ΔT-100I	1640	4235	84" x 146"	100	5	330
ΔT-125I	1710	4310	84" x 146"	125	7.5	330
ΔT-150I	2205	5570	95" x 178"	150	7.5	468
ΔT-175I	2350	5810	95" x 178"	175	10	468
ΔT-200I	2850	8440	114" x 210"	200	10	718
ΔT-250I	3300	8640	114" x 210"	250	15	718

The information, recommendations and opinions set forth herein are offered solely for your consideration, inquiry and verification, and are not, in part or total, to be construed as constituting a warranty or representation for which we assume legal responsibility.